
EPM Elektropřístroj	**Technical data sheet**	**Contactors**	**Date: 1. 9. 2024**
	**DC controlled contactor for railway application**	**Designation / Marking:**	
	C9.00 with DC DL coil extended coil voltage range	**C9.00 _ _ V DC DL** _ _ rated control voltage	

Technical data				
Rated insulation voltage		U_i	690	[V]
Impulse withstand voltage		U_{imp}	8	[kV]
Overvoltage category according to ČSN EN 60947-1			III	[-]
Working environment - degree of pollution			3	[-]
Ambient temperature range			-50 .. +70	[°C]
Storage temperature			-55 .. +80	[°C]
Operating altitude			2000	[m]
Environmental conditions			any acc. to EN 60721-2-1	
Flammability of materials according to EN 60695-11-10 or UL94			V-0	[-]
Fire behaviour acc. to EN45545-2			hazard level HL3 - product category EL10, requirement set R26	
Category according to EN 45545-2			product group EL10 , requirements HL3 / R26	
Vibration and shock resistance according to ČSN EN 61373 ed. 2			category 1, class A	
Level of safety and reliability according to EN 13849-1			B10d = 2 000 000 cycles	
Main dimensions W x H x D			45 x 78,5 x 73	[mm]
Mass			0,34	[kg]
Mass including unit packing			0,36	[kg]
Degree of protection acc. to VDE 0106, part 100			IP20	
Main poles				
Number and type of contacts			3 x NO	
Conventional free air thermal current		I_{th}	32	[A]
Rated operational current I_e				[A]
	in AC-1 at 400 V	I_e	25	
	in AC-1 at 500 V	I_e	25	
	in AC-3 at 400 V	I_e	11,3	
	in AC-4 at 400 V	I_e	4,7	
	in DC-1 at 220 V DC (all three poles connected in series)	I_e	25	
	in DC-3 at 220 V DC (all three poles connected in series)	I_e	12	
	in DC-5 at 220 V DC (all three poles connected in series)	I_e	8	
Max. output power of controlled motor in AC-3				[kW]
	at 220-230 V		2,2	
	at 380-400 V		5,5	
	at 500 V		5,5	
	at 660-690 V		5,5	
Max. output power of controlled motor in AC-4:				[kW]
	at 380-400 V		2	
	at 500 V		2,5	
Short time withstand currents from the cold state at the max. ambient temp. 40 °C:				[A]
	1 sec	Min. conductor cross section 2,5 mm^2	220	
	5 sec		150	
	10 sec		120	
	30 sec		75	
	1 min		60	
	3 min		40	
	10 min		30	
Max. number of on-load op. cycles per hour				[op. cycles/hour]
	in AC-1		300	
	in AC-3		1200	
	in AC-4		600	
Recommended fuse char. aM			10	[A]
Type of coordination according to IEC 60947-4-1			2	
Mechanical durability			$10x10^6$	[op. cycles]
Electrical durability in AC-1 at 400 V for rated op. current			$0,15×10^6$	
Electrical durability in AC-3 at 400 V for rated op. current			$1,5 x 10^6$	
Dissipation on main pole (ea)		ΔU	48	[mV]
		I	25	[A]
Power dissipation per pole		P	1,2	[W]
Operating times from coil energization to				
	closing of the N.O. contact		12,7 - 16,6	[ms]
	opening of the N.C. contact		non aplicable	[ms]
Operating times from coil deenergization to				
	opening of the N.O. contact		7,1 - 12,2	[ms]
	closing of the N.C. contact		non aplicable	[ms]
Positively guided contacts acc. to IEC 60947-4-1/A1 ed. 2 - Annex F (auxiliary contacts linked with power contacts - mirror contact).				non aplicable
Terminal type			Screw-type	
Screw type / Screw size			combined PH2 + simple slots / M3,5	
Tightening torque			0,8	[Nm]
Conductor cross-section:				
	Rigid		1..4	$[mm^2]$
	Flexible		1..2,5	$[mm^2]$
Auxiliary contacts				
Configuration			can be completed with additional blocks PK or PKB	

EPM Elektropřístroj	**Technical data sheet**	**Contactors**	**Date: 1. 9. 2024**
	**DC controlled contactor for railway application**	**Designation / Marking:**	
	C9.00 with DC DL coil extended coil voltage range	**C9.00 _ _ V DC DL** _ _ rated control voltage	

Control circuit		
Rated control voltage	DC	[V]
Tolerance of control voltage	-30 .. +25	[%]
Drop-out voltage	>25% Uc	
Pull-in input power of DC control coil at rated voltage	90 .. 100	[W]
Hold-in input power of DC control coil at rated voltage	1,8 .. 2,2	[W]
Terminal type	screw-type terminal	
Screw size	M3,5	
Tightening torque	0,8	[Nm]
Max. conductor cross-section:		
Rigid	1 .. 2,5	[mm^2]
Flexible	0,75 .. 1,5	[mm^2]

Marking of terminals

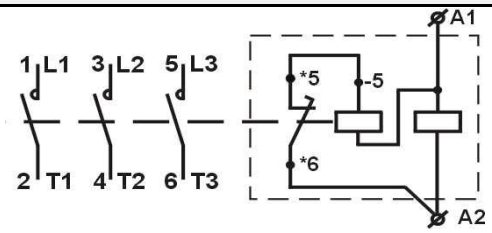

All terminals facilitate connecting of either single conductor up to the maximum cross-section, or two conductors of the same or by one degree different cross-sections except for the maximum one. Flexible conductors must not be compacted ba brazing.

Ecological sustainability	
REACH Regulation	REACh Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant
Mercury free	Yes
OEEZ - certificate of involvement in the system	AK-6-019136