


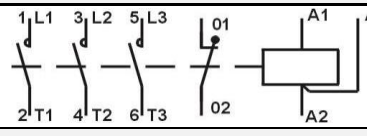
	Technical data sheet	Contactors Date: 19. 1. 2024	
	AC controlled contactor C9.01 with AC coil	Designation / Marking: C9.01 _ _ V / _ _ Hz _ _ rated control voltage / _ _ rated control frequency	
Technical data			
Rated insulation voltage	U_i	690	[V]
Impulse withstand voltage	U_{imp}	8	[kV]
Overvoltage category according to ČSN EN 60947-1		III	[-]
Working environment - degree of pollution		3	[-]
Ambient temperature range		-50 .. +60	[°C]
Storage temperature		-55 .. +80	[°C]
Operating altitude		2000	[m]
Environmental conditions		any acc. to EN 60721-2-1	
Flammability of materials according to EN 60695-11-10 or UL94		V-0	[-]
Vibration and shock resistance according to ČSN EN 61373 ed. 2		category 1, class A	
Level of safety and reliability according to EN 13849-1		B10d = 2 000 000 cycles	
Main dimensions W x H x D		45 x 78,5 x 73	[mm]
Mass		0,34	[kg]
Mass including unit packing		0,36	[kg]
Degree of protection acc. to VDE 0106, part 100		IP20	
Main poles			
Number and type of contacts		3 x NO	
Conventional free air thermal current	I_{th}	32	[A]
Rated operational current I_e			
in AC-1 at 400 V	I_e	25	
in AC-1 at 500 V	I_e	25	
in AC-3 at 400 V	I_e	11,3	[A]
in AC-4 at 400 V	I_e	4,7	
in DC-1 at 220 V DC (all three poles connected in series)	I_e	25	
in DC-3 at 220 V DC (all three poles connected in series)	I_e	12	
in DC-5 at 220 V DC (all three poles connected in series)	I_e	8	
Max. output power of controlled motor in AC-3			
at 220-230 V		2,2	[kW]
at 380-400 V		5,5	
at 500 V		5,5	
at 660-690 V		5,5	
Max. output power of controlled motor in AC-4:			
at 380-400 V		2	[kW]
at 500 V		2,5	
Short time withstand currents from the cold state at the max. ambient temp. 40 °C:			
1 sec		220	
5 sec		150	
10 sec		120	[A]
30 sec		75	
1 min	Min. conductor cross section 2,5 mm ²	60	
3 min		40	
10 min		30	
Max. number of on-load op. cycles per hour			
in AC-1		300	[op. cycles/hour]
in AC-3		1200	
in AC-4		600	
Recommended fuse char. aM		10	[A]
Type of coordination according to IEC 60947-4-1		2	
Mechanical durability		10x10 ⁶	
Electrical durability in AC-1 at 400 V for rated op. current		0,15x10 ⁶	[op. cycles]
Electrical durability in AC-3 at 400 V for rated op. current		1,5 x 10 ⁶	
Dissipation on main pole (ea)	ΔU	48	[mV]
Power dissipation per pole	I	25	[A]
Operating times from coil energization to	P	1,2	[W]
closing of the N.O. contact		17 .. 22	[ms]
opening of the N.C. contact		non applicable	[ms]
Operating times from coil deenergization to			
opening of the N.O. contact		9,1 .. 12	[ms]
closing of the N.C. contact		non applicable	[ms]
Positively guided contacts acc. to IEC 60947-4-1/A1 ed. 2 - Annex F (aux. contacts linked with power contacts - mirror contact).		YES	
Terminal type		Screw-type	
Screw type / Screw size		combined PH2 + simple slots / M3,5	
Tightening torque		0,8	[Nm]
Conductor cross-section:			
Rigid		1..4	[mm ²]
Flexible		1..2,5	[mm ²]

	Technical data sheet	Contactors	Date: 19. 1. 2024
		AC controlled contactor	Designation / Marking:
C9.01 with AC coil		C9.01 __ V / __ Hz __ rated control voltage / __ rated control frequency	

Auxiliary contacts			
Configuration	1 x NC		
	can be completed with additional blocks PK or PKB		
Rated insulation voltage	U_i	690	[V]
Impulse withstand voltage	U_{imp}	8	[kV]
Conventional free air thermal current	I_{th}	25	[A]
Rated operational current in AC-15:			
at 220-230 V	I_e	4	[A]
at 380-400 V	I_e	2	[A]
Electrical durability in AC-15:			
at 220-230 V, 4 A		$0,8 \times 10^6$	[op. cycles]
		1×10^6	[op. cycles]
Dissipation on aux. pole (ea)	ΔU	20	[mV]
	I	4	[A]
Power Disipation for one aux. pole NO	P	0,08	[W]
Operating times from coil energization to			
closing of the N.O. contact		non applicable	[ms]
opening of the N.C. contact		10,1 .. 17	[ms]
Operating times from coil deenergization to			
opening of the N.O. contact		non applicable	[ms]
closing of the N.C. contact		15,4 .. 18,8	[ms]
Positively guided contacts according to IEC 60947-5-1/A2 ed. 2 - Annex L (mechanically linked contacts).		non applicable	
Terminal type	screw-type terminal		
Screw type / Screw size	combined PH2 + simple slots / M3,5		
Tightening torque		0,8	[Nm]
Max. conductor cross-section:			
Rigid		1 .. 2,5	[mm ²]
Flexible		0,75 .. 1,5	[mm ²]
Control circuit			
Rated control voltage	AC		
Tolerance of control voltage	-15 .. +10		
Drop-out voltage	>25% U_c		
Pull-in input power of AC control coil $\pm 10\%$	60		
Hold-in input power of AC control coil $\pm 10\%$	10,5 / 3,9		
Terminal type	screw-type terminal		
Screw size	M3,5		
Tightening torque		0,8	[Nm]
Max. conductor cross-section:			
Rigid		1 .. 2,5	[mm ²]
Flexible		0,75 .. 1,5	[mm ²]
Marking of terminals			
			
Ecological sustainability			
REACH Regulation	REACH Declaration		
REACH free of SVHC	Yes		
EU RoHS Directive	Compliant		
Mercury free	Yes		
OEEZ - certificate of involvement in the system	AK-6-019136		